



ABP AdvancedDrain®

Prefabricated Composite Drain .125

Description

ABP AdvancedDrain® .125 is a 0.125 inch thick drainage composite consisting of parallel geometric drainage channels backed with a nonwoven filter fabric designed to eliminate hydrostatic pressure from behind below grade foundation walls, retaining walls, planters and plaza decks.

The product is produced from an extruded polymer matrix of tangled randomly oriented monofilaments. The polymer matrix is then shaped into a series of parallel porous channels designed to allow flow in all directions, and then attached (heat bonded) to a polyester nonwoven filter fabric designed to prevent soil from entering the matrix of the system while providing ample flow of water.

Applications

- Residential foundation walls
- Retaining walls
- Planters
- Plaza decks and walls

Features and Benefits

Filtration and drainage in one package.

Lightweight, easy to handle and install.


Installation in either vertical or horizontal direction.

Simple installation with either construction adhesive or termination bar.

Sufficient fabric overlap for sealing adjacent panels with construction adhesive to prevent soil intrusion at the joints.

Polymer core resistant to most known solvents and chemicals including acids and bases.

Convenient working width and roll length.

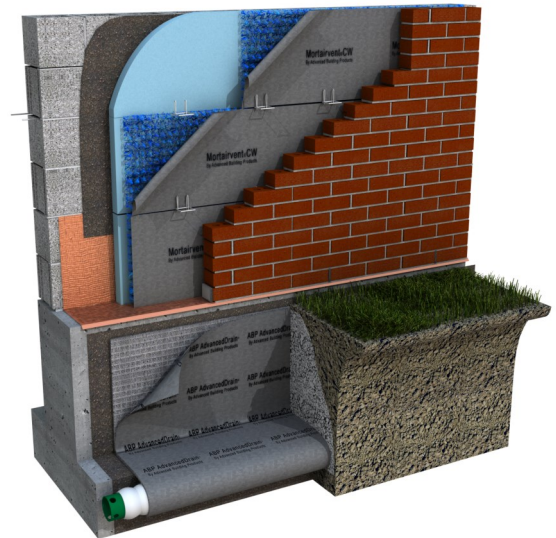



ABP AdvancedDrain®

Physical Properties

Core Polymer Polypropylene
Filter fabric Polymer Polyester

Description	Test Method	User	Imperial	Metric
Core Weight*	ASTM D5261	32 (g/sqft)	11.4 (oz/sqyd)	388 (g/sqm)
Composite Weight*	ASTM D5261	45.3 (g/sqft)	14.4 (oz/sqyd)	488 (g/sqm)
Core Thickness*	ASTM D5199	.125 (in)	.125 (in)	.32 (cm)
Composite Thickness*	ASTM D5199	0.145 (in)	0.145 (in)	.37 (cm)
Fabric Weight*	ASTM D5261	9.3 (g/sqft)	2.9 (oz/sqyd)	100 (g/sqm)
Core width*		3.29 (ft)	39.5 (in)	100.3 (cm)
Fabric Overlap*		3 (in)	3 (in)	7.6 (cm)

Flow Rates

Soil Depth	Wall Pressure (psf)*	Sandy Soil Seepage (gal/min/ft)*	Silty Soil Seepage (gal/min/ft)*	Clay Soil Seepage (gal/min/ft)*	Drain Flow Capacity (gal/min/ft)*	Minimum Safety Factor
10	500	0.15	0.015	0.0015	3.8	25
15	750	0.22	0.022	0.0022	3.4	25
20	1000	0.29	0.029	0.0029	3	10
30	1500	0.43	0.043	0.0043	2.6	6
40	2000	0.62	0.063	0.0063	2.3	3

Packaging

Core Width (in)* 39.5
 Roll Length (ft)* 150
 Roll Area min (sqf) 493.8
 Roll weight (lbs)* 47

*Nominal values

**All rolls are stretch wrapped for shipment. Roll weight includes package.